

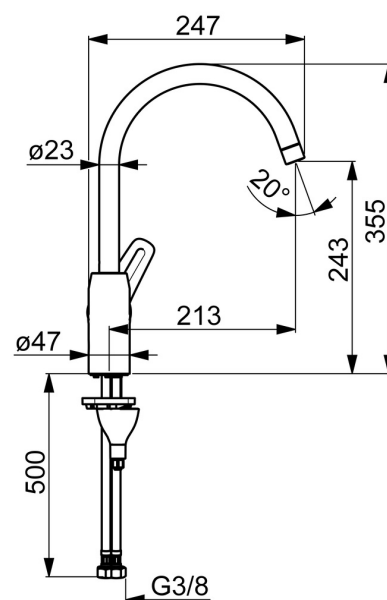


EAN: 4057304003134
static.hansa.com/45132283

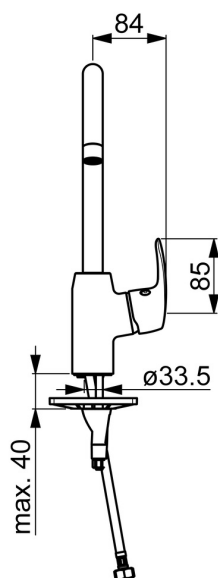

- Kitchen
- Single-lever, side operated
- Deck mounted
- Chrome
- Swivel spout, Swivel range limiting option
- Standard aerator
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting, Inner body made of DZR brass

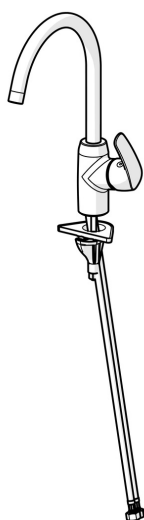

Technical data

Flow properties

Flow-rate at 3 bar

12.6 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

213 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817

Noise class

I (ISO 3822) Oras lab.

Approvals and Declarations

KIWA

K6116/08

DVGW

DW-6506CS0580

ABP

P-IX 29696/IA

Declaration of conformity

DoC

EPD

S-P-06396

Sustainability

EPD module A1 (kg CO2 eq.)

8,14

EPD module A2 (kg CO2 eq.)

0,39

EPD module A3 (kg CO2 eq.)

3,58

EPD module A1-A3 (kg CO2 eq.)

12,11

EPD module A4 (kg CO2 eq.)

0,24

EPD module B7 (kg CO2 eq.)

4964,40

EPD module C2 (kg CO2 eq.)

0,02

EPD module C3 (kg CO2 eq.)


0,02

EPD module C4 (kg CO2 eq.)


0,37

EPD module D (kg CO2 eq.)

-6,85

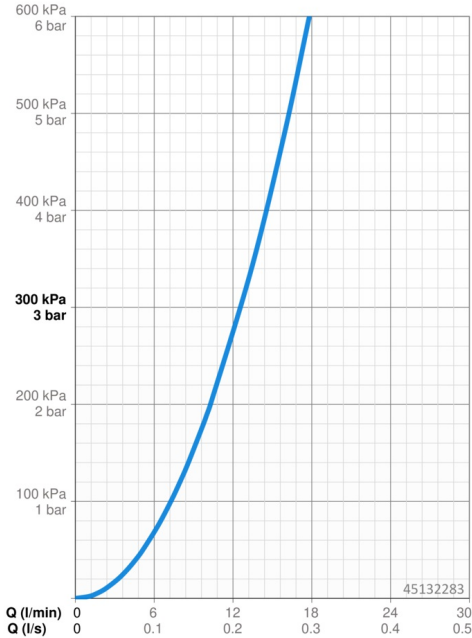

Spare parts

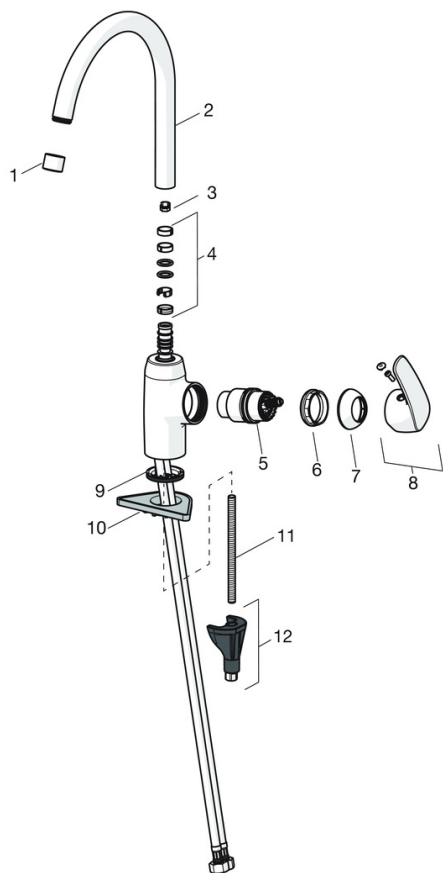

SP45132283

	Name	Code
01	Aerator, M22x1 STD CC A	59914436
02	High spout, L=208 Discontinued	59914498
03	Spout overturning stopper, 60° / 0°	59914264
03	Spout overturning stopper, 120° Discontinued	59914429
04	Sealing kit	59914263
05	Cartridge, 4.0 Classic	59914129
06	Tightening nut, M42x1.5, SW 38	59914128
07	Covering cap Discontinued	59914454
08	Lever	59914453
09	Bottom seal	59914591
10	Supporting plate	59910008
11	Fixing screw, M8x1, L=130	59914474
12	Fixing set	59914475