

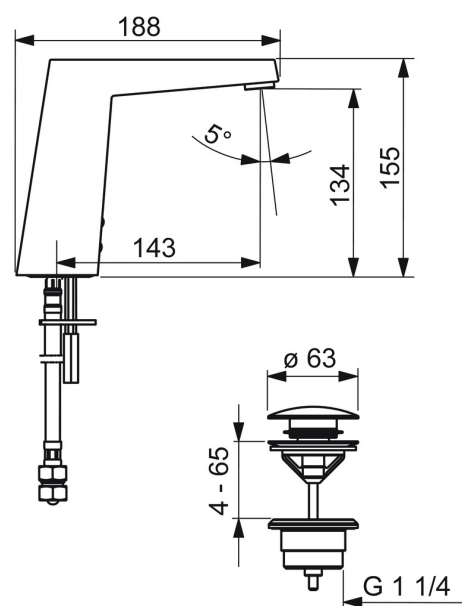


EAN: 4057304014185
static.hansa.com/57492219

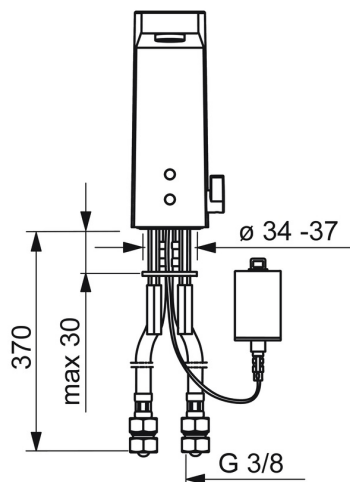

- Washbasin
- Public & Semi-public
- Touchless, Bluetooth®, Battery-operated
- Deck mounted
- Chrome
- Fixed spout, Casted construction
- Hidden aerator
- Temperature control handle
- Push pop-up waste without draw-rod
- Adjustable hot water stop (included, retrofittable)
- Mixing valve for manual temperature control, Non-return valve(s), Litter filter(s)
- Autofocus infrared sensor, Solenoid valve, Low battery indicator
- Flexible inlet pipes
- Software settings adjustable via App

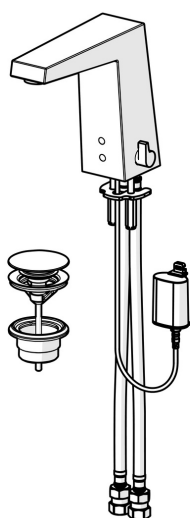

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

5.4 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

143 mm

Backflow prevention (EN1717)

AA

Material

Brass

Software settings

Afterflow period

3 s (1-20 s)

Automatic flush

off (off/1-120 h)

Automatic flush period

30 s (1-1800 s)

Max. flow period

2 min (1 - 1800 s)

Electronic properties

Battery

Lithium 2CR5 6 V

Bluetooth version

4.x (D034445)

Regulations

EU Directives

C € Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU

EN standard

EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4

Protection class

IP 55

Approvals and Declarations

DVGW


CW-6514CR0161

UN38.3


UN38-3 Maxell 2CR5

Declaration of conformity

RED

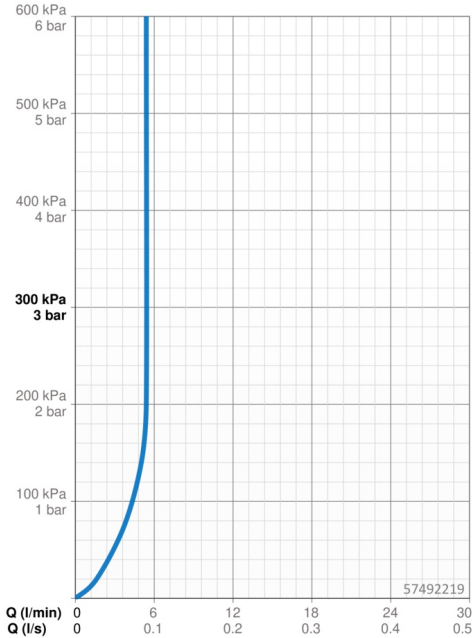

Spare parts

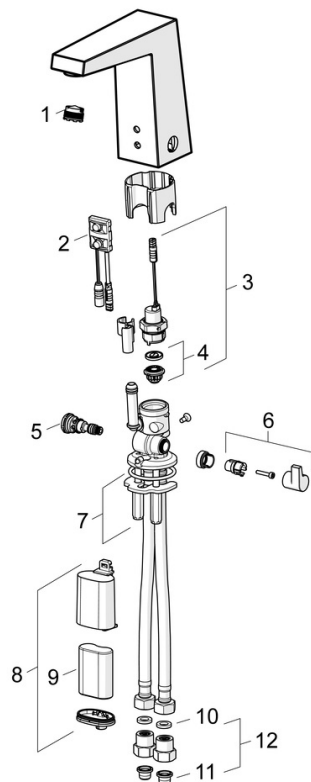

SP57492211

	Name	Code
01	Aerator, M18.5x1, TJ	59913366
02	Sensor, 6 V Discontinued	59914093
02	Sensor, 6/9/12 V, Bluetooth	59914567
03	Solenoid valve, 6 V	59914091
04	Membrane for solenoid valve	1006500V
04	Membrane support ring Discontinued	59914090
05	Temperature regulator	59914193
06	Temperature control handle	59914189
07	Fixing plates with nuts	59914132
08	Battery casing, 2CR5 6 V	59914088
09	Battery, 2CR5 6 V	59911670
10	Gasket, 8x14.3x2	59914087
11	Litter filters	59914085
12	One-way valve with litter screen	59914086
N.I.	Limiter	59914106